


# Active Directory - LDAP Section

In this section, we set up Active Directory using the LDAP protocol.

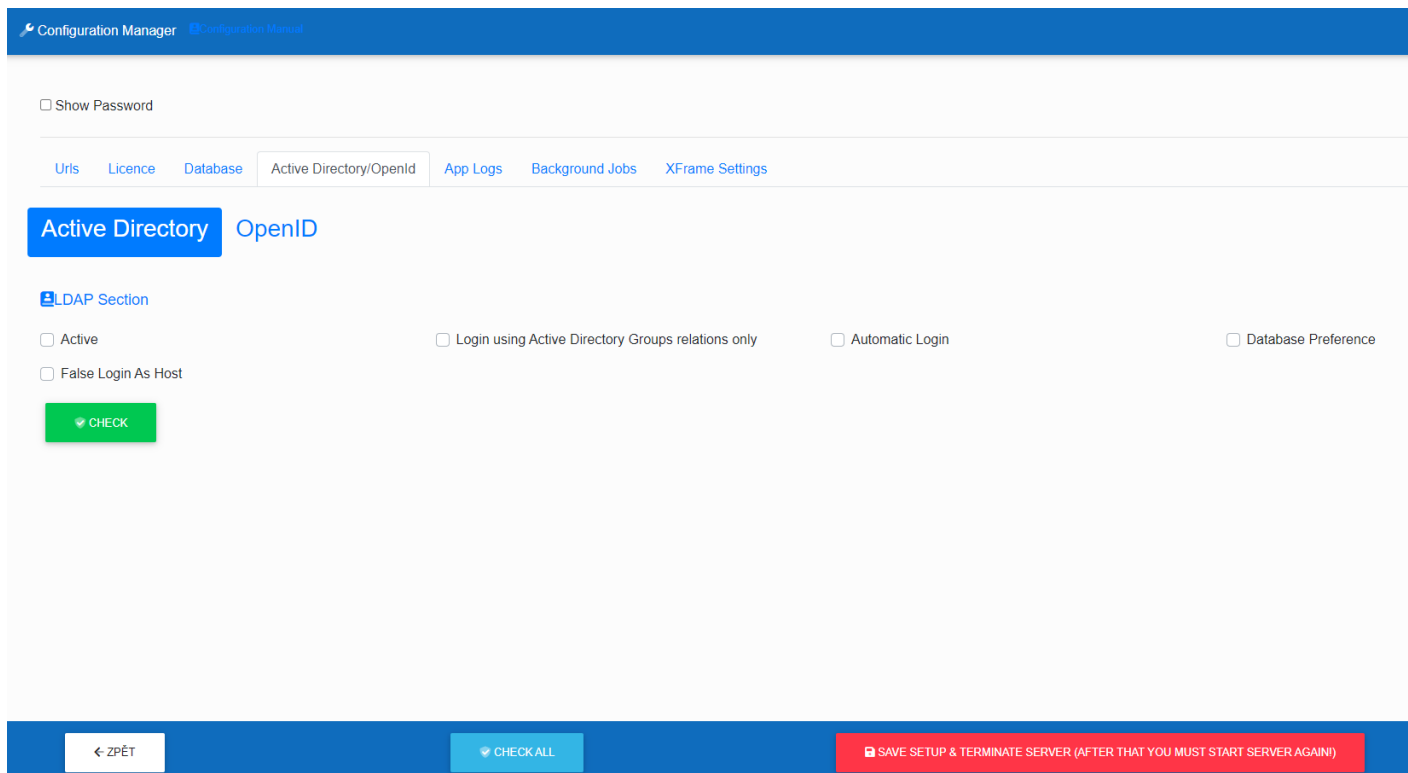

The screenshot shows the Configuration Manager interface. At the top, there's a blue header with "Configuration Manager" and a link to the "Configuration Manual". Below the header, there's a "Show Password" checkbox. A navigation bar contains links for "Urls", "Licence", "Database", "Active Directory/OpenId", "App Logs", "Background Jobs", and "XFrame Settings". The "Active Directory" tab is selected, and the "OpenID" sub-tab is active. Under the "LDAP Section", there are four checkboxes: "Active", "Login using Active Directory Groups relations only", "Automatic Login", and "Database Preference". There is also a "False Login As Host" checkbox. A green "CHECK" button is located below the checkboxes. At the bottom of the interface, there's a blue footer bar with three buttons: "← ZPĚT", "CHECK ALL", and "SAVE SETUP & TERMINATE SERVER (AFTER THAT YOU MUST START SERVER AGAINI)".

- "Active" tells us if we want Infoport to work with AD.
- "Login using Active Directory Groups relations only" it is possible to set a ban on the login of a user who does not have an Active Directory group assigned.
- "Automatic Login" determines if users will automatically log into AD if they enter the Infoport URL in the browser.
- "Database Preference" tells us that when logging in, it goes to the database to the users first and then to AD
- "False Login As Host" allows us to choose if we want a user who is not in AD to be able to log in as a portal guest.

Revision #5

Created 7 April 2022 11:24:00

Updated 23 April 2024 12:24:49 by Karolína Kavanová