

OpenID

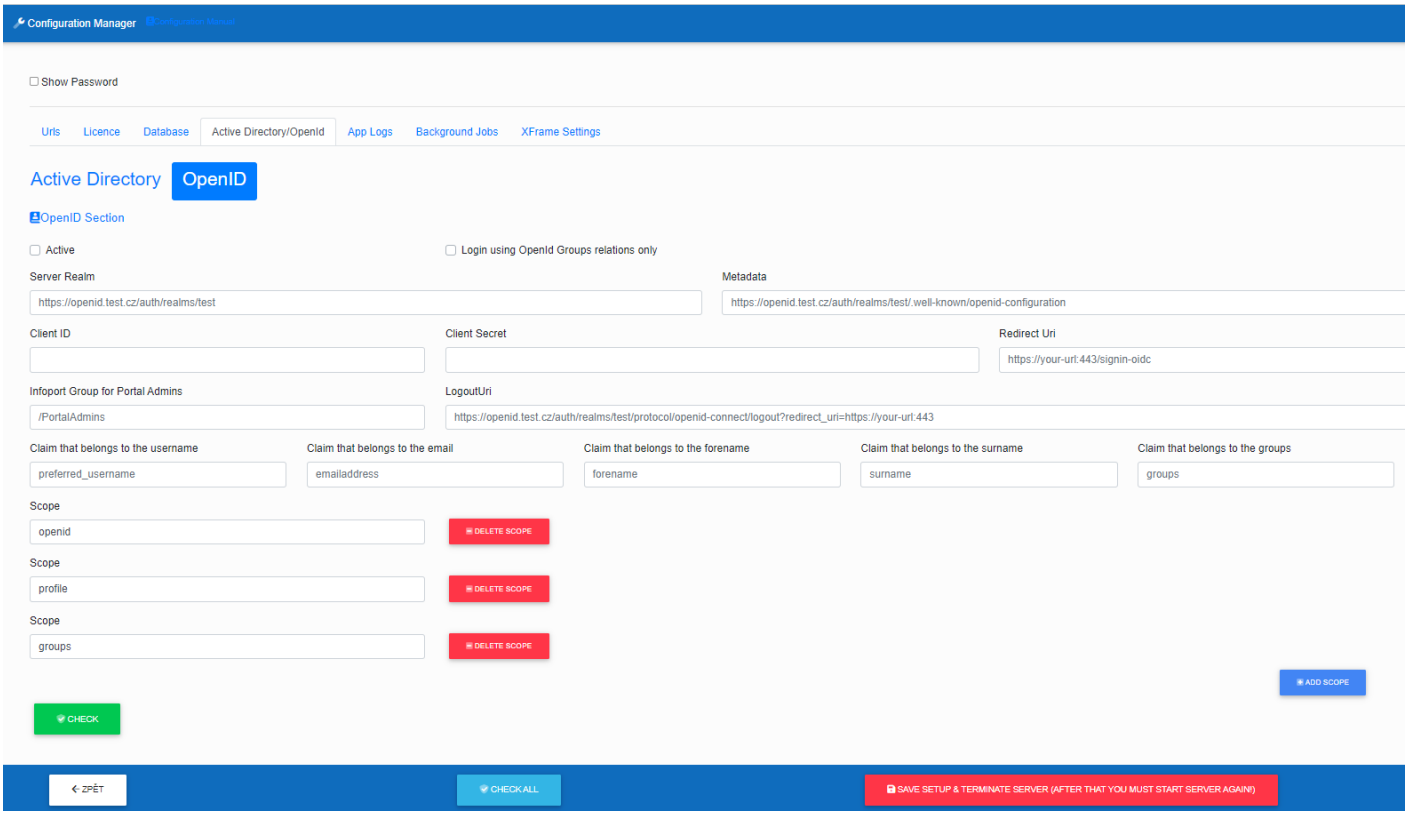

- "*Active*" tells us if we want Infoport to work with OpenID.
- "Login using OpenId Groups relations only" it is possible to set a ban on the login of a user who does not have an OpenID group assigned.


Server Realm – fill in the link to the open id server

For Microsoft Entra ID: In Endpoints, find the Authority URL item (Accounts in this organizational directory only).

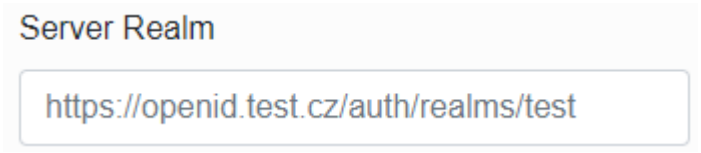

Metadata – fill in the link to the open id server metadata

For Microsoft Entra ID: In Endpoints, find the OpenID Connect metadata document item

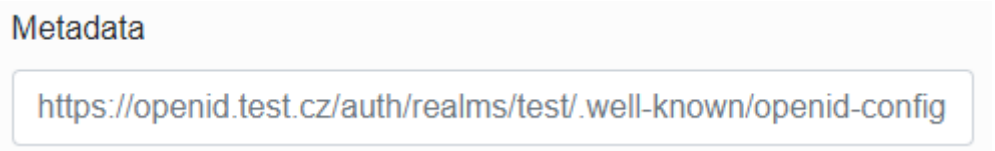


ClientID – fill in the reference to the Client identifier

For Microsoft Entra ID: In Essentials, find the Application (client) ID item




Client Secret – insert client secret

For Microsoft Entra ID: The administrator must generate it in Essentials / Client credentials / ***Value***

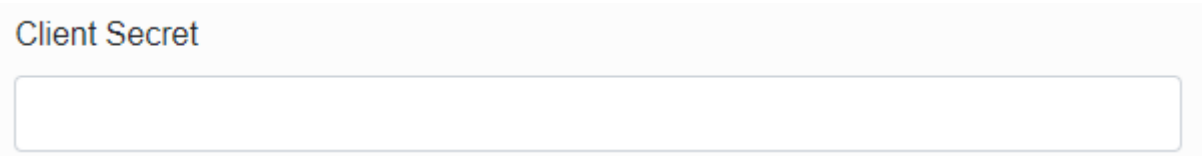


Redirect Uri – enter the url that will be called after logging out of the infoport

For Microsoft Entra ID:

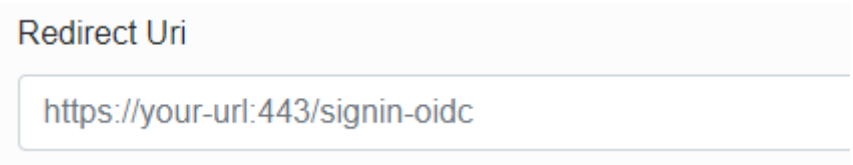


Infoport Group for Portals Admins – enter the name of the group where you want the Infoport portal administrator users to be

For Microsoft Entra ID:

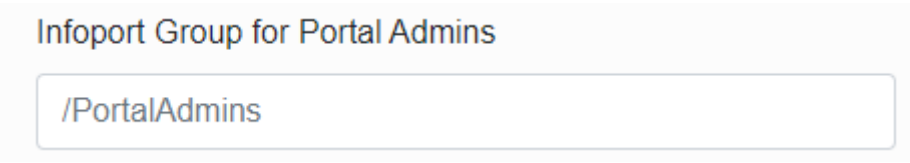


LogoutUri – enter a url that logs out of open id


For Microsoft Entra ID:

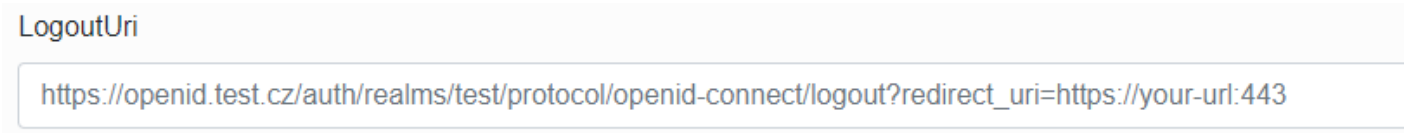


Claim that belongs to the username – specify a claim by which the infoport will pull the infoport username from the response

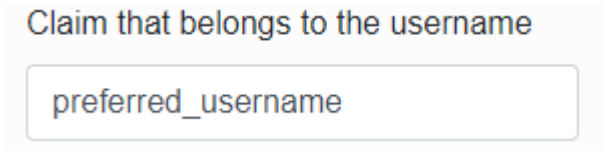


Claim that belongs to the email – specify a claim by which the infoport will pull the email from the response

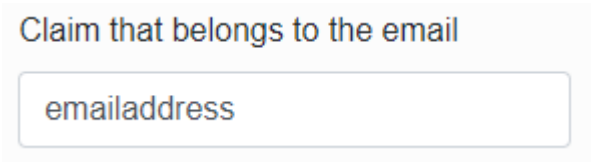


Claim that belongs to the forename – specify a claim by which the infoport will pull the user's first name from the response

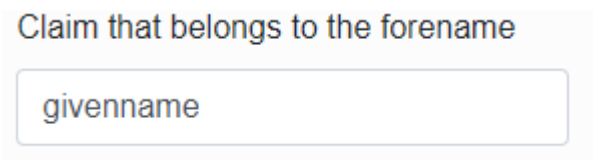


Claim that belongs to the surname – specify a claim by which the infoport will pull the user's last name from the response

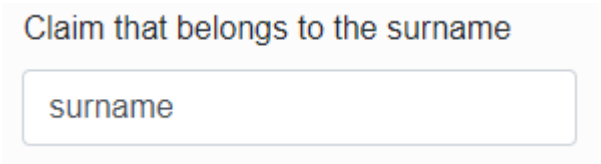

Claim that belongs to the groups – specify a claim according to which the infoport will pull the groups to which the user belongs from the response

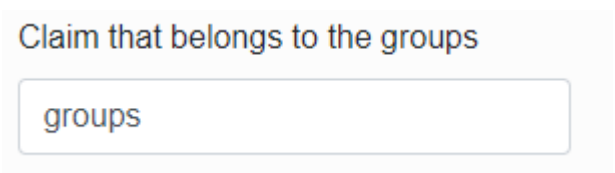

Add ***Open ID Scopes***,to return all necessary attributes

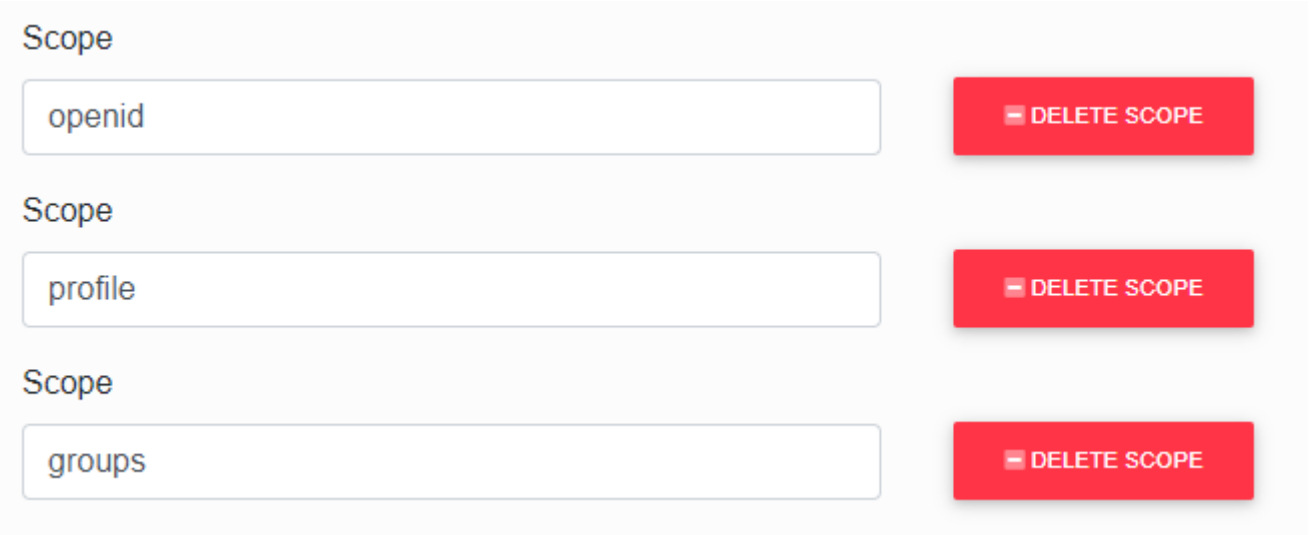

Other related information about OpenID:

https://doc.eainfoport.cz/books/user-manual/page/mapping-a-group-to-openid

https://doc.eainfoport.cz/books/user-manual/page/login-of-a-user-who-does-not-have-an-openid-group-assigned

https://doc.eainfoport.cz/books/question-answer/page/missing-repository-permissions-during-ad-or-openid-login

---

Revision #10
Created 4 May 2022 06:11:57
Updated 31 July 2026 09:37:58 by Jitka Kalíšová