

Default settings

EA Infoport supports a permission system at the package level (repository browser tree branches), both for reading and (since version 7.5) for writing.

Thus, it is possible to restrict the reading of parts of the model to certain groups or users.


It is thus possible to restrict access of certain users to (for example) specific projects, sensitive processes, risk analyses, strategic business models, etc.

If there is no default setting, i.e. the setting is taken from the parent root package, then the repository is not visible by default, or reading is not allowed.

Permissions can be set for groups and users, via the "Permissions" button.


The rights are applied hierarchically from the package on which they are set downwards.

EA Infoport allows you to disable/allow users or groups from accessing different packages by default using the following button:

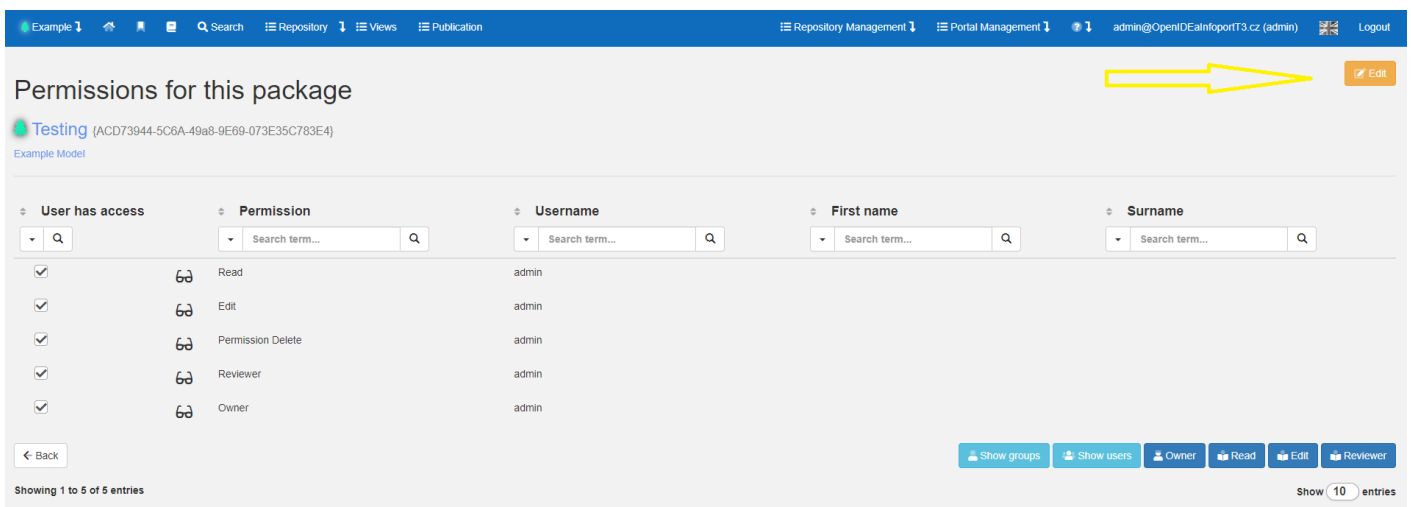

The screenshot shows the 'Permissions for this package' page for the 'Testing' package (ACD73944-5C6A-49a8-9E69-073E35C783E4). The page has a blue header with navigation links and a user profile. The main content area has a table with columns: User has access, Permission, Username, First name, and Surname. The table lists five permissions: Read, Edit, Permission Delete, Reviewer, and Owner, all assigned to the 'admin' user. A yellow arrow points to the 'Edit' button in the top right corner. At the bottom, there are buttons for 'Show groups', 'Show users', 'Owner', 'Read', 'Edit', and 'Reviewer', and a 'Showing 1 to 5 of 5 entries' indicator.

User has access	Permission	Username	First name	Surname
<input checked="" type="checkbox"/>	Read	admin		
<input checked="" type="checkbox"/>	Edit	admin		
<input checked="" type="checkbox"/>	Permission Delete	admin		
<input checked="" type="checkbox"/>	Reviewer	admin		
<input checked="" type="checkbox"/>	Owner	admin		

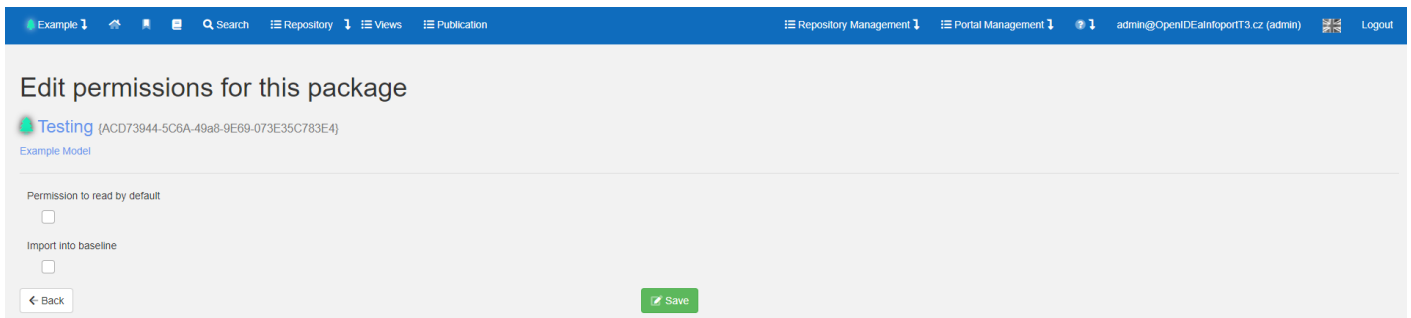

The screenshot shows the 'Edit permissions for this package' page for the 'Testing' package (ACD73944-5C6A-49a8-9E69-073E35C783E4). The page has a blue header with navigation links and a user profile. The main content area has a form with two checkboxes: 'Permission to read by default' and 'Import into baseline'. A green 'Save' button is at the bottom right. At the bottom left, there is a 'Back' button.

Without default settings

Example 1

Search

Repository 1

Views

Publication

Repository Management 1

Portal Management 1

admin@OpenIDealInfoportT3.cz (admin)

Logout

Edit permissions for this package

Testing (ACD73944-5C6A-49a8-9E69-073E35C783E4)
Example Model

Permission to read by default

☒

Import into baseline

☐

Back

Save

Reading is enabled by default

Example 1

Search

Repository 1

Views

Publication

Repository Management 1

Portal Management 1

admin@OpenIDealInfoportT3.cz (admin)

Logout

Edit permissions for this package

Testing (ACD73944-5C6A-49a8-9E69-073E35C783E4)
Example Model

Permission to read by default

☐

Import into baseline

☐

Back

Save

Reading is disabled by default

Revision #1
Created 10 June 2024 10:40:03 by Karolína Kavanová
Updated 10 June 2024 10:52:25 by Karolína Kavanová