

Default settings

EA Infoport supports a permission system at the package level (repository browser tree branches), both for reading and (since version 7.5) for writing.

Thus, it is possible to restrict the reading of parts of the model to certain groups or users.


It is thus possible to restrict access of certain users to (for example) specific projects, sensitive processes, risk analyses, strategic business models, etc.

If there is no default setting, i.e. the setting is taken from the parent root package, then the repository is not visible by default, or reading is not allowed.

Permissions can be set for groups and users, via the "Permissions" button.


The rights are applied hierarchically from the package on which they are set downwards.

EA Infoport allows you to disable/allow users or groups from accessing different packages by default using the following button:

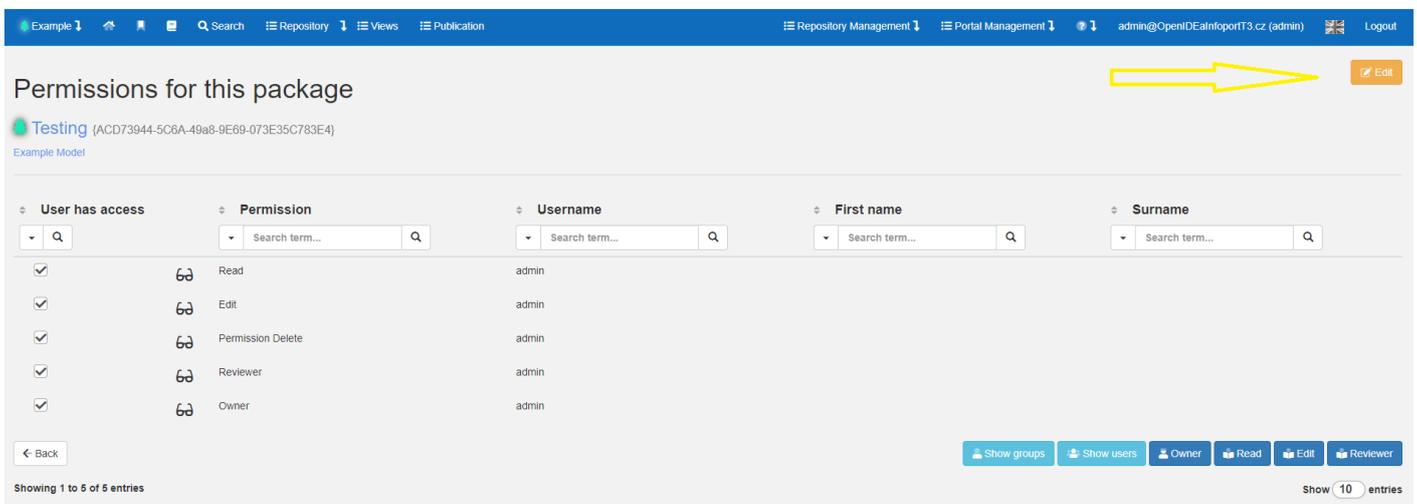

The screenshot shows the 'Permissions for this package' page for the 'Testing' package. The page has a blue header with navigation links and a user profile. The main content area has a title 'Permissions for this package' and a yellow arrow pointing to an 'Edit' button. Below the title is a table with columns for 'User has access', 'Permission', 'Username', 'First name', and 'Surname'. The table contains five rows of permissions for the user 'admin'. At the bottom right, there are buttons for 'Show groups', 'Show users', 'Owner', 'Read', 'Edit', and 'Reviewer'. A 'Back' button is at the bottom left.

| User has access | Permission | Username | First name | Surname |
|-------------------------------------|-------------------|----------|------------|---------|
| <input checked="" type="checkbox"/> | Read | admin | | |
| <input checked="" type="checkbox"/> | Edit | admin | | |
| <input checked="" type="checkbox"/> | Permission Delete | admin | | |
| <input checked="" type="checkbox"/> | Reviewer | admin | | |
| <input checked="" type="checkbox"/> | Owner | admin | | |

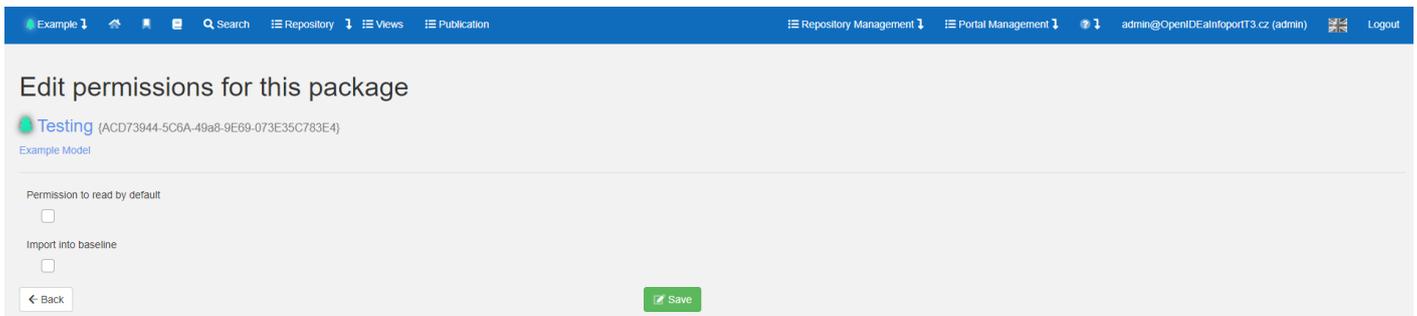

The screenshot shows the 'Edit permissions for this package' page for the 'Testing' package. The page has a blue header with navigation links and a user profile. The main content area has a title 'Edit permissions for this package' and a form with two checkboxes: 'Permission to read by default' and 'Import into baseline'. A 'Save' button is at the bottom right.

Without default settings

Example 1 Search Repository Views Publication Repository Management Portal Management admin@OpenIDealInfoportT3.cz (admin) Logout

Edit permissions for this package

Testing (ACD73944-5C6A-49a8-9E69-073E35C783E4)
Example Model

Permission to read by default

Import into baseline

[← Back](#) [Save](#)

Reading is enabled by default

Example 1 Search Repository Views Publication Repository Management Portal Management admin@OpenIDealInfoportT3.cz (admin) Logout

Edit permissions for this package

Testing (ACD73944-5C6A-49a8-9E69-073E35C783E4)
Example Model

Permission to read by default

Import into baseline

[← Back](#) [Save](#)

Reading is disabled by default

Revision #1

Created 10 June 2024 10:40:03 by Karolína Kavanová

Updated 10 June 2024 10:52:25 by Karolína Kavanová