

# Permissions to parts of the repository - default settings

The EA Information Portal supports a package-level permission system (repository browser tree branches) for both read and (as of version 7.5) write permissions.

It is therefore possible to restrict the reading of parts of the model to certain groups or users. This functionality is not available in Enterprise Architect itself.


It is therefore possible to restrict access of certain users to (for example) specific projects, sensitive processes, risk analyses, strategic business models, etc.

This feature fundamentally supports the effort to have all models in one repository.

If there is no default setting, i.e. the setting is taken from the parent root package, then the repository is not visible by default, or reading is not allowed.

Permissions can be set for groups and users.

Permissions are applied hierarchically from the package they are set on downwards.

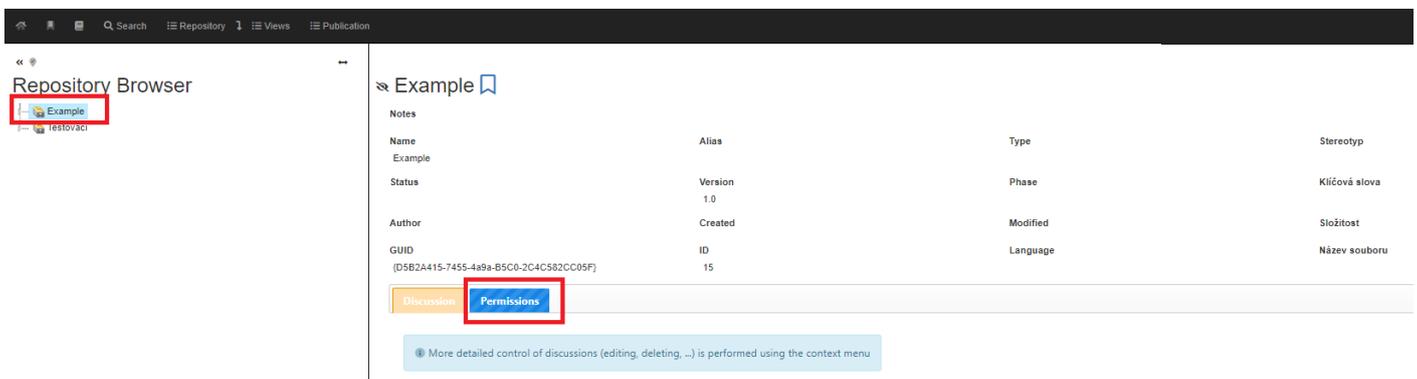

The screenshot shows the EA Information Portal interface. On the left, the 'Repository Browser' is visible with a tree structure where the 'Example' package is highlighted. The main content area displays the details for the 'Example' package, including a table of properties and a 'Permissions' button highlighted with a red box.

Name	Alias	Type	Stereotyp
Example			
Status	Version	Phase	Klíčová slova
	1.0		
Author	Created	Modified	Složitost
GUID	ID	Language	Název souboru
(DSB2A415-7455-4a9a-B5C0-2C4C582CC05F)	15		

Discussion Permissions

More detailed control of discussions (editing, deleting, ...) is performed using the context menu

EA Infoport allows by default to disable/enable access of users or groups to various packages using the following button:

Permissions for this package (Cancel filter ✕) [Edit]

Example

User has access	Permission	Username	First name	Surname
<input type="checkbox"/>	Read	Test	Test	TEST
<input type="checkbox"/>	Edit	Test	Test	TEST
<input type="checkbox"/>	Permission Delete	Test	Test	TEST
<input type="checkbox"/>	Reviewer	Test	Test	TEST
<input type="checkbox"/>	Owner	Test	Test	TEST

Showing 1 to 5 of 5 entries (Total 110 entries) Show 10 entries

## Edit permissions for this package

Example

**Permission to read by default** [Save]

Import into baseline

← Back

In the event that the default settings are not sufficient for us and it is necessary to specify the range of other users in more detail, it is possible to specify the roles in more detail and set access directly on the user or group.

Permissions for this package (Cancel filter ✕) [Edit]

Example

User has access	Permission	Username	First name	Surname
<input type="checkbox"/>	Read	Test	Test	TEST
<input type="checkbox"/>	Edit	Test	Test	TEST
<input type="checkbox"/>	Permission Delete	Test	Test	TEST
<input type="checkbox"/>	Reviewer	Test	Test	TEST
<input type="checkbox"/>	Owner	Test	Test	TEST

Showing 1 to 5 of 5 entries (Total 110 entries) Show 10 entries

An overview of the roles is shown in the table below:

	read	edit	deletion	review
Reader	✓	X	X	X
Editor	✓	✓	X	✓
Authorized to delete	✓	X	✓	X
Reviewer	✓	X	X	✓
Owner	✓	✓	✓	✓

Revision #4

Created 10 February 2023 11:35:07 by Karolína Kavanová

Updated 27 March 2024 17:17:12 by Karolína Kavanová