


Setting default section rights

The default section rights settings can be found under the "*Edit*" icon.

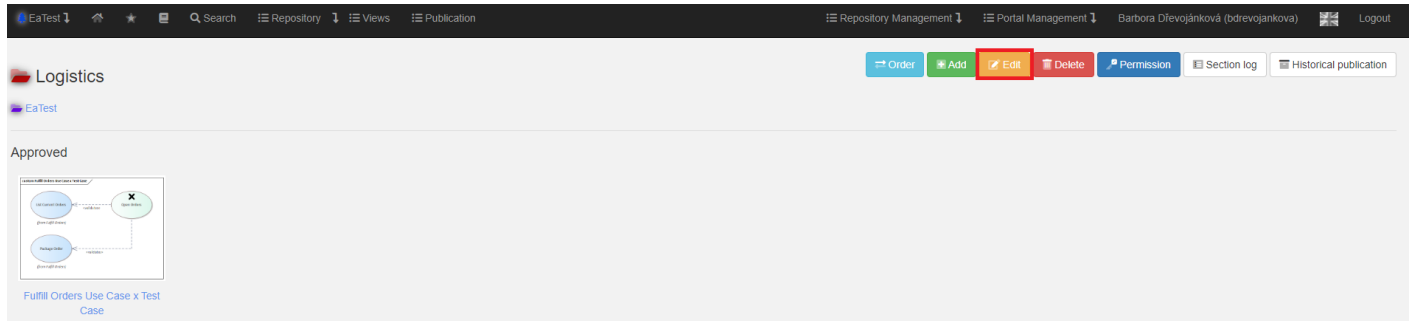

The user will be presented with the following dialog where they can set/change the default rights "**Reading is enabled**" and "**Approval is required**".

- **Reading is allowed:**

- When checked, users/groups can default to read the package and any child packages that do not have the default read disabled.
- When checked with an "x", users/groups cannot default read a package and all its child packages that do not have default read enabled.
- With an "empty square", the user/group inherits default privileges from the parent packages.

- **Approval required:**

- When checked, diagrams are added to the publication in the "*To be approved*" state. When unchecked, the status is "Approved".

EaTest

Search

Repository

Views

Publication

Edit section

Logistics

EaTest

Name

Logistics

Notes

Color

Permission to read by default

☐

Approval required

☒

← Back

Save

If everything is set, the user clicks the "Save" button.

Revision #4

Created 23 May 2022 10:02:58

Updated 8 February 2024 09:24:27 by Karolína Kavanová