


Setting default section rights

The default section rights settings can be found under the "Edit" icon.

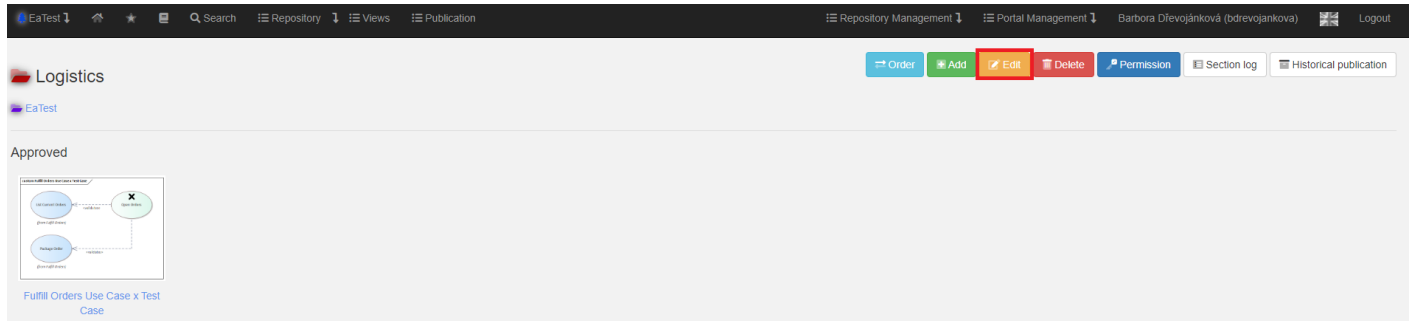

The user will be presented with the following dialog where they can set/change the default rights "**Reading is enabled**" and "**Approval is required**".

- **Reading is allowed:**

- When checked, users/groups can default to read the package and any child packages that do not have the default read disabled.
- When checked with an "x", users/groups cannot default read a package and all its child packages that do not have default read enabled.
- With an "empty square", the user/group inherits default privileges from the parent packages.

- **Approval required:**

- When checked, diagrams are added to the publication in the "To be approved" state. When unchecked, the status is "Approved".

EaTest

Search

Repository

Views

Publication

Edit section

Logistics

EaTest

Name

Logistics

Notes

Color

Permission to read by default

☐

Approval required

☒

← Back

Save

If everything is set, the user clicks the "Save" button.

Revision #4

Created 23 May 2022 10:02:58

Updated 8 February 2024 09:24:27 by Karolína Kavanová